

PA Series PA(M) Series Pressure Independent Control Valve Actuators

Starting at 27 lb-force and up to 112 lb-force

Application

The PA(M) Series is a line of linear motor actuators to be used primarily on Bray PIC Valves utilized in Building Automation Systems. These actuators are available with a multitude of options for On/Off/Floating or Modulating with or without electronic Failsafe.

These actuators automatically calibrate to the stroke of the valve as soon as power is applied and are field selectable direct or reverse acting.

A simple, reliable, versatile solution for your Bray Commercial Simple Set pressure Independent control valves!



DOCUMENT
Features
Valve Specs
Sizing/Install Tips
Piping Geometry
Dimensions
Close-Off's
LOOKING FOR MORE
© 2022 Bray International, Inc.
03/11/25

PA Series Actuators - Specifications

Technical Specifications - Actuators						
Actuator Models	For Valves Sizes 1/2" to 1-1/4"				For Valves Sizes 1.5" to 2"	
	PA24-27	PA24-27-FS	PAM24-27	PAM24-27-FS	PAM24-100	PAM24-100-FS
	On/Off & Floating		Modulating		On/Off, Floating & Modulating	
	Non-Fail Safe	Fail Safe	Non-Fail Safe	Fail Safe	Non-Fail Safe	Fail Safe
Supply Voltage	22 to 26 AC/DC				22 to 26 VAC or 28 to 32 VDC	
Power Consumption	5VA	10VA	5VA	10VA	6VA	6VA, 20VA Start Up
Control Signal	2 Position On/Off or 3-Point Floating		Analog, 0-10VDC or 2-10VDC; 4-20mA with external 500Ω resistor		2 Position On/Off (Digital-Pulse Width Modulation), 3 Point Floating, Modulating (Analog), 2-10VDC; 4-20mA	
Input Impedance	4.7 K		10.0 K	100.0 K	100.0 K	
Feedback Signal	No		0-10VDC or 2-10VDC		4 to 20 mA or 2 to 10VDC adjustable	
Failsafe Function	No	Yes (60 Sec. Runtime)	No	Yes (60 Sec. Runtime)	No	Yes (60 Sec. Runtime)
Anti-Stick	No		Optional ¹		Yes	
Operation Time	120 Seconds				90 Seconds	
Enclosure Rating	NEMA type 3R (Equivalent to IP54)					
Ambient Temperature	36°F to 122°F (2°C to 50°C)				0°F to 122° (-18°C to 50°C)	
Humidity Rating	5 to 95% RH Non Condensing					
Connection	3 wires 18 AWG halogen free cable, 3.2 ft.	4 wires 18 AWG halogen free cable, 3.2 ft.			Terminal Connection. Use 18 AWG Minimum	
Noise Rating	>35dBA					
Dimensions	(L) 4.09" x (W) 2.08" x (H) 3.62"			(L) 4.09" x (W) 2.08" x (H) 4.18"	(L) 4.80" x (W) 3.60" x (H) 6.93"	
Weight	0.9 lb. (0.4 kg)				2.0 lb. (0.9 kg)	
Warranty	5 Years limited from time of shipment					
Agency Listing	UL, C E					

¹Anti-Stick Option

With the anti-stick option activated, the actuator will make one full cycle every 24 hours, if the actuator constantly has been in fully open or fully closed position during the previous 24 hours. This operation will clear up any possible impurities accumulated in the valve, and re-calculate the end positions.

PA Series Actuators - Model Number Matrix

PA24-27	24V On/Off & Floating - Non-Fail Safe
PA24-27-FS	24V On/Off & Floating - Fail Safe
PAM24-27	24V Modulating - Non-Fail Safe
PAM24-27-FS	24V Modulating - Fail Safe
PAM24-100	24V On/Off, Floating & Modulating - Non-Fail Safe
PAM24-100-FS	24V On/Off, Floating & Modulating - Fail Safe
PAM24-112	24V On/Off, Floating & Modulating - Non-Fail Safe



PA Series Actuators - PA24-27


Technical Specifications - PA24-27 Actuator

Electrical	Actuator Model	PA24-27	For Simple Set PIC Valve sizes 1/2" to 1-1/4"
	Type	On/Off and Floating	
	Force	27 lb-force	
	Operating Voltage	22 to 26 AC/DC	
	Power Consumption	5 VA	
	Input Signal	Digital, 2 positions or 3 point floating	
	Input Impedance	4.7 K	
	Electrical Connection	3-wire halogen free cable 18 AWG (0.8 mm ²), 3.2 feet (1M) long)	
Operation	Fail Safe	No	
	Stall Protection	Auto Shutoff for end of travel and jammed/stuck	
	Runtime	120 Seconds	
	Direction	Reversible. Default - Up to Open	
	Cycle Life	30,000	
Environmental	Manual Override	Yes	
	Enclosure Rating	IP54 (Equivalent to NEMA 3R) - Not intended for outdoor use without additional protection.	
	Ambient Conditions	Operating — 36°F to 122°F (2°C to 50°C) Media Temp. — 36°F to 248°F (2°C to 120°C) Storage — -22 to 122°F (-30 to 50°C) Humidity Rating — 5 to 95% RH Non Condensing	
	Audible Noise Rating	>35 dBA	
	Dimensions	(L) 4.09"x (W) 2.08"x (H) 3.62"	
Misc	Weight	0.9 lb. (0.4 kg)	
	Agency Certifications	UL, CE	
	Warranty	5 Years limited from time of shipment.	

WIRING - (CABLE)



DIP SWITCHES

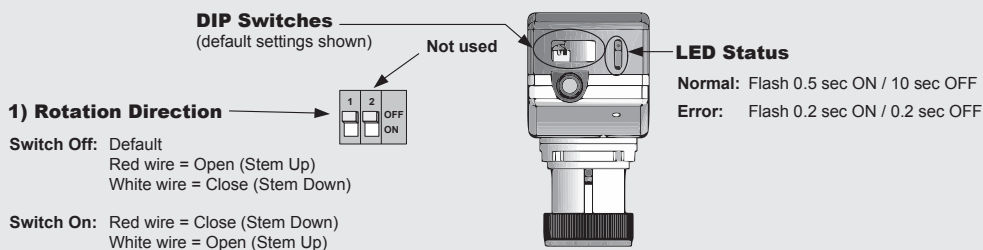

NOTE: For additional operating information consult PA24-27 IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.


PA Series Actuators - PAM24-27




Technical Specifications - PAM24-27 Actuator

Electrical	Actuator Model	PAM24-27	For Simple Set PIC Valve sizes 1/2" to 1-1/4"
	Type	Modulating	
	Force	27 lb-force	
	Operating Voltage	22 to 26 AC/DC	
	Power Consumption	5 VA	
	Input Signal	Analog, 0-10VDC or 2-10VDC; 4-20mA with external 500Ω resistor	
	Feedback Signal	0-10VDC or 2-10VDC	
	Input Impedance	10.0 K	
Operation	Electrical Connection	4-wire halogen free cable 18 AWG (0.8 mm ²), 3.2 feet (1M) long)	
	Fail Safe	No	
	Stall Protection	Auto Shutoff for end of travel and jammed/stuck	
	Runtime	120 Seconds	
	Direction	Reversible. Default - Up to Open	
	Auto Stroke	Yes	
	Cycle Life	30,000	
Environmental	Manual Override	Yes	
	Enclosure Rating	IP54 (Equivalent to NEMA 3R) - Not intended for outdoor use without additional protection.	
	Ambient Conditions	Operating — 36°F to 122°F (2°C to 50°C) Media Temp. — 36°F to 248°F (2°C to 120°C) Storage — -22 to 122°F (-30 to 50°C) Humidity Rating — 5 to 95% RH Non Condensing	
	Audible Noise Rating	>35 dBA	
	Dimensions	(L) 4.09"x (W) 2.08"x (H) 3.62"	
Misc	Weight	0.9 lb. (0.4 kg)	
	Agency Certifications	UL, CE	
	Warranty	5 Years limited from time of shipment.	

WIRING - (CABLE)

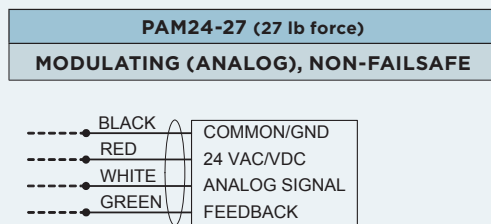

DIP SWITCHES

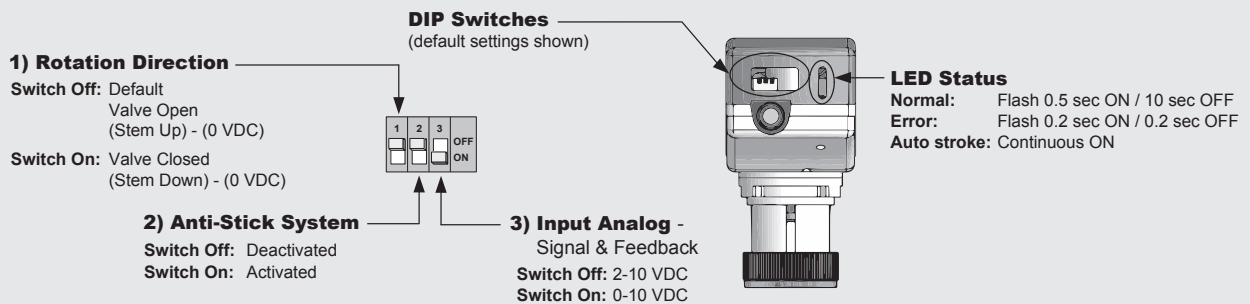

NOTE: For additional operating information consult PAM24-27 IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.





PA Series Actuators - PA24-27-FS

Technical Specifications - PA24-27-FS Actuator


Electrical	Actuator Model	PA24-27-FS	For Simple Set PIC Valve sizes 1/2" to 1-1/4"
	Type	On/Off and Floating	
	Force	27 lb-force	
	Operating Voltage	22 to 26 AC/DC	
	Power Consumption	10 VA	
	Input Signal	Digital, 2 positions or 3 point floating	
	Input Impedance	4.7 K	
	Electrical Connection	4-wire halogen free cable 18 AWG (0.8 mm ²), 3.2 feet (1M) long)	
Operation	Fail Safe	Yes - 60 Seconds Runtime	
	Fail Safe Function	Electronic - Enerdrive ¹	
	Stall Protection	Auto Shutoff for end of travel and jammed/stuck	
	Runtime	120 Seconds	
	Direction	Reversible. Default - Up to Open	
	Cycle Life	30,000	
	Manual Override	Yes	
Environmental	Enclosure Rating	IP54 (Equivalent to NEMA 3R) - Not intended for outdoor use without additional protection.	
	Ambient Conditions	Operating — 36°F to 122°F (2°C to 50°C) Media Temp. — 36°F to 248°F (2°C to 120°C) Storage — -22 to 122°F (-30 to 50°C) Humidity Rating — 5 to 95% RH Non Condensing	
	Audible Noise Rating	>35 dBA	
	Dimensions	(L) 4.09"x (W) 2.08"x (H) 3.62"	
	Weight	0.9 lb. (0.4 kg)	
Misc	Agency Certifications	UL, CE	
	Warranty	5 Years limited from time of shipment.	

Note¹: The Enerdrive system is a patented method of storing energy (using super capacitors) that is later used to drive the actuator to it failsafe position during a power failure. For additional operating information consult PA24-27-FS IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.

WIRING - (CABLE)

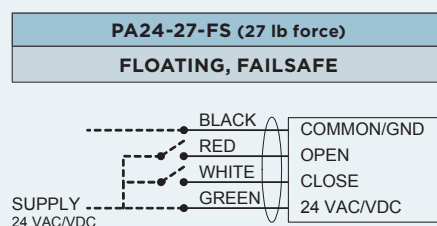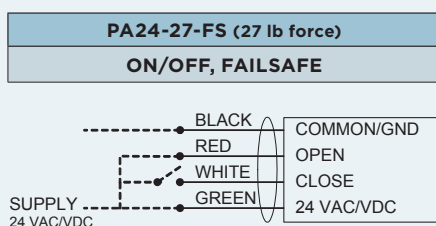

DIP SWITCHES

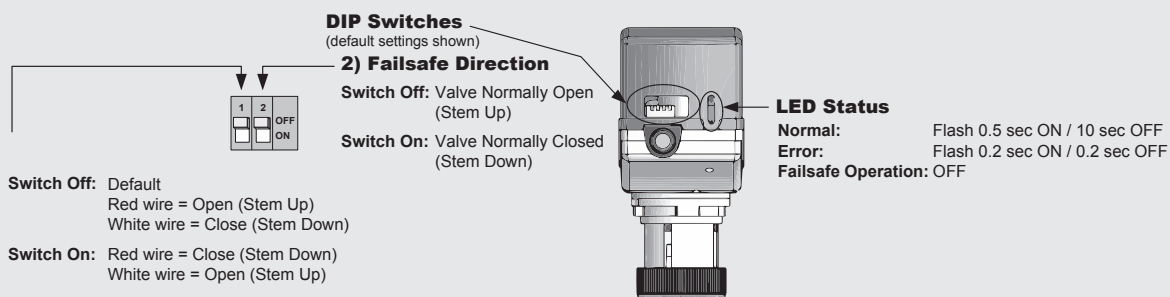

NOTE: The Enerdrive system is a patented method of storing energy (using super capacitors) that is later used to drive the actuator to it failsafe position during a power failure. For additional operating information consult PA24-27 IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.




Technical Specifications - PAM24-27-FS Actuator

Electrical	Actuator Model	PAM24-27-FS	For Simple Set PIC Valve sizes 1/2" to 1-1/4"
	Type	Modulating	
	Force	27 lb-force	
	Operating Voltage	22 to 26 AC/DC	
	Power Consumption	10 VA	
	Input Signal	Analog, 0-10VDC or 2-10VDC; 4-20mA with external 500Ω resistor	
	Feedback Signal	0-10VDC or 2-10VDC	
	Input Impedance	100 K	
Operation	Electrical Connection	4-wire halogen free cable 18 AWG (0.8 mm ²), 3.2 feet (1M) long)	
	Fail Safe	Yes - 60 Seconds Runtime	
	Fail Safe Function	Electronic - Enerdrive ¹	
	Stall Protection	Auto Shutoff for end of travel and jammed/stuck	
	Runtime	120 Seconds	
	Direction	Reversible. Default - Up to Open	
	Auto Stroke	Yes	
Environmental	Cycle Life	30,000	
	Manual Override	Yes	
	Enclosure Rating	IP54 (Equivalent to NEMA 3R) - Not intended for outdoor use without additional protection.	
	Ambient Conditions	Operating — 36°F to 122°F (2°C to 50°C) Media Temp. — 36°F to 248°F (2°C to 120°C) Storage — -22 to 122°F (-30 to 50°C) Humidity Rating — 5 to 95% RH Non Condensing	
	Audible Noise Rating	>35 dBA	
Misc	Dimensions	(L) 4.09"x (W) 2.08"x (H) 3.62"	
	Weight	0.9 lb. (0.4 kg)	
	Agency Certifications	UL, CE	
	Warranty	5 Years limited from time of shipment.	


Note¹: The Enerdrive system is a patented method of storing energy (using super capacitors) that is later used to drive the actuator to it failsafe position during a power failure. For additional operating information consult PAM24-27-FS IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.

WIRING - (CABLE)

PAM24-27-FS (27 lb force) MODULATING (ANALOG), FAILSAFE



DIP SWITCHES

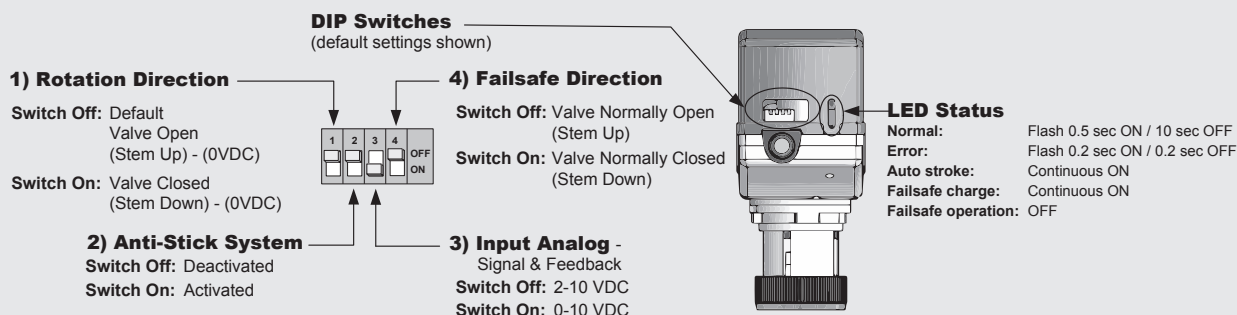

NOTE: The Enerdrive system is a patented method of storing energy (using super capacitors) that is later used to drive the actuator to it failsafe position during a power failure. For additional operating information consult PAM24-27 IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.




PA Series Actuators - PAM24-100

Technical Specifications - PAM24-100 Actuator


Electrical	Actuator Model	PAM24-100	For Simple Set PIC Valve sizes 1-1/2" to 2"
	Type	On/Off, Floating and Modulating	
	Force	100 lb-force	
	Operating Voltage	22 to 26VAC / 28 to 32 VDC	
	Power Consumption	6 VA	
	Input Signal	2 Position On/Off (Digital-Pulse Width Modulation), 3 Point Floating, Modulating (Analog), 2-10VDC; 4-20mA	
	Feedback Signal	4 to 20 mA or 2 to 10 VDC adjustable (factory set 2-10 VDC)	
	Input Impedance	100 K	
Operation	Electrical Connection	4-wire halogen free cable 18 AWG (0.8 mm ²), 3.2 feet (1M) long) Terminal Connection. Use 18AWG [0.8mm ²] minimum	
	Fail Safe	No	
	Stall Protection	Auto Shutoff for end of travel and jammed/stuck	
	Runtime	90 Seconds	
	Direction	Reversible. Default - Up to Open	
	Auto Stroke	Yes	
	Cycle Life	60,000	
Environmental	Manual Override	Yes	
	Enclosure Rating	NEMA Type 2 - Not intended for outdoor use without additional protection.	
	Ambient Conditions	Operating — 0°F to 122°F (-18°C to 50°C) Storage — -22 to 122°F (-30 to 50°C) Humidity Rating — 5 to 95% RH Non Condensing	
	Audible Noise Rating	>35 dBA	
	Dimensions	(L) 4.80"x (W) 3.60"x (H) 6.93"	
Misc	Weight	2.0 lb. (0.9 kg)	
	Agency Certifications	UL, CE	
Misc	Warranty	5 Years limited from time of shipment.	

WIRING - (TERMINAL)

PAM24-100 (100 lb force)
ON/OFF, FLOATING & MODULATING (ANALOG), NON-FAILSAFE

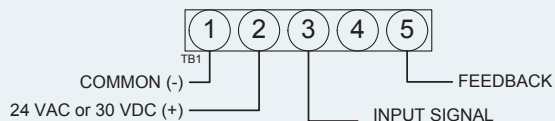


DIP SWITCHES - DIGITAL SIGNAL

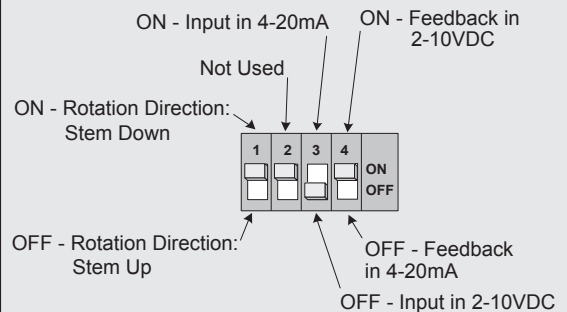


DIGITAL SIGNAL

3 WIRE / 2 POSITION ON/OFF

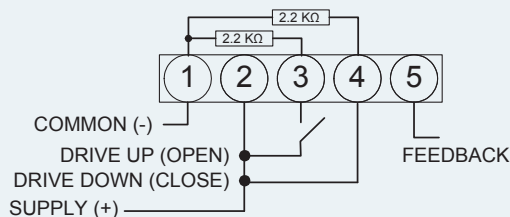

4 WIRE / 3 POINT FLOATING

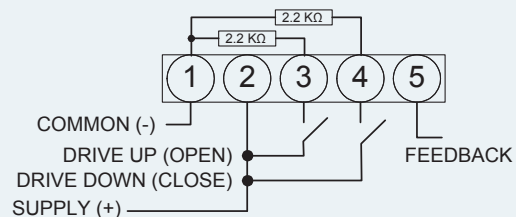

Special Consideration for Digital Control

In this mode, the actuator is sensitive to induced electrical voltages from external sources. To prevent such interference, if the signal on pins 4 and 3 on TB1 are from an external 24VAC source, install a resistor 2.2kohm, 0.5W between pins 4 and 1 and another of 2.2k ohms, 0.5W between pins 3 and 1 of TB1. These resistors are included.

NOTE: For additional operating information consult PAM24-100 IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.

PA Series Actuators - PAM24-100-FS




Technical Specifications - PAM24-100-FS Actuator


Electrical	Actuator Model	PAM24-100-FS	For Simple Set PIC Valve sizes 1-1/2" to 2"
	Type	On/Off, Floating and Modulating	
	Force	100 lb-force	
	Operating Voltage	22 to 26VAC / 28 to 32 VDC	
	Power Consumption	6 VA, 20VA Start Up	
	Input Signal	2 Position On/Off (Digital-Pulse Width Modulation), 3 Point Floating, Modulating (Analog), 2-10VDC; 4-20mA	
	Feedback Signal	4 to 20 mA or 2 to 10 VDC adjustable (factory set 2-10 VDC)	
	Input Impedance	100 K	
Operation	Electrical Connection	4-wire halogen free cable 18 AWG (0.8 mm ²), 3.2 feet (1M) long) Terminal Connection. Use 18AWG [0.8mm ²] minimum	
	Fail Safe	Yes	
	Fail Safe Function	Electronic - Enerdrive ¹	
	Stall Protection	Auto Shutoff for end of travel and jammed/stuck	
	Runtime	90 Seconds	
	Direction	Reversible. Default - Up to Open	
	Auto Stroke	Yes	
Environmental	Cycle Life	60,000	
	Enclosure Rating	NEMA Type 2 - Not intended for outdoor use without additional protection.	
	Ambient Conditions	Operating — 0°F to 122°F (-18°C to 50°C) Storage — -22 to 122°F (-30 to 50°C) Humidity Rating — 5 to 95% RH Non Condensing	
	Audible Noise Rating	>35 dBA	
	Dimensions	(L) 4.80"x (W) 3.60"x (H) 6.93"	
Misc	Weight	2.0 lb. (0.9 kg)	
	Agency Certifications	UL, CE	
	Warranty	5 Years limited from time of shipment.	

Note¹: The Enerdrive system is a patented method of storing energy (using super capacitors) that is later used to drive the actuator to its failsafe position during a power failure. For additional operating information consult PAM24-100-FS IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.

DIP SWITCHES - DIGITAL SIGNAL

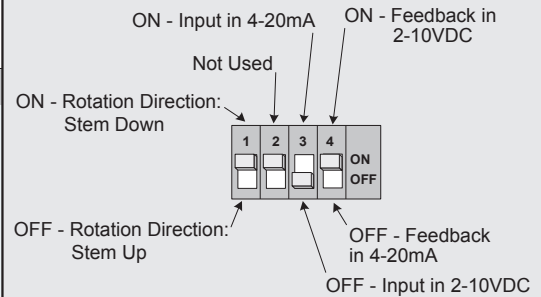


WIRING - (TERMINAL)

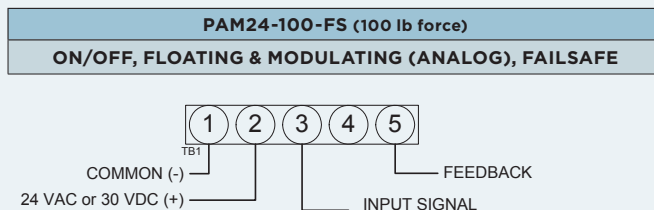


DIGITAL SIGNAL

3 WIRE / 2 POSITION ON/OFF

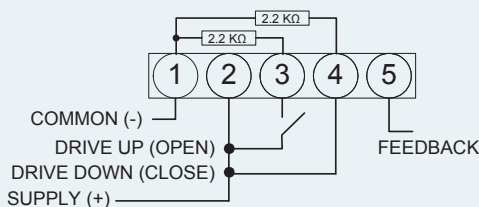

4 WIRE / 3 POINT FLOATING

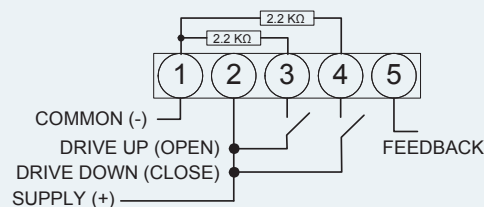

Special Consideration for Digital Control

In this mode, the actuator is sensitive to induced electrical voltages **from external sources**. To prevent such interference, if the signal on pins 4 and 3 on TB1 are from an **external 24VAC source**, install a resistor 2.2kohm, 0.5W between pins 4 and 1 and another of 2.2k ohms, 0.5W between pins 3 and 1 of TB1. These resistors are included.

NOTE: For additional operating information consult PAM24-100-FS IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.


PA Series Actuators - PAM24-112

Technical Specifications - PAM24-112 Actuator

Electrical	Actuator Model	PAM24-112	For Simple Set 2" High Flow Valves & Simple Set Max PIC Valve sizes 2-1/2" to 3"
	Type	On/Off, Floating and Modulating	
	Force	112 lb-force	
	Operating Voltage	24 VAC (+/-20%) at 50/60 Hz or 24 VDC (+20%, -10%)	
	Power Consumption	3.5 W, 6.6 VA	
	Input Signal	On/Off, Floating and Modulating - 0 to 10 V, Ri> 100kΩ	
	Feedback Signal	0 to 10 V, Load> 10 kΩ Starting Point U ₀ 0 or 10 V Control Span ΔU 10 V Switching Range Xsh 200 mV	
	Electrical Connection	5 x 20 AWG (0.20 mm ²)	
Operation	Fail Safe	No	
	Action	Direct or Reverse Acting	
	Stall Protection	Auto Shutoff for end of travel and jammed/stuck	
	Runtime	150 Seconds default (DIP switch adjustable) at full stroke for Simple Set Max 2-1/2" & 3"	
	Response Time	200 ms	
	Stroke	0.31 to .78 inches (8 to 20mm)	
	Cycle Life	80,000	
Environmental	Manual Override	Yes	
	Enclosure Rating	IP54 (NEMA 3S Equivalent); Flame Retardent Plastic - Not intended for outdoor use without additional protection.	
	Ambient Conditions	Ambient Temperature — 14° to 131°F (-10° to 55°C) Max. Media Temperature — 212°F (100°C) Humidity Rating — 5 to 85% RH Non Condensing	
	Dimensions	(L) 6.40"x (W) 2.80"x (H) 7.90"	
	Weight	2.1 lb. (1 kg)	
Misc	Agency Certifications	CE	
	Warranty	5 Years limited from time of shipment.	

Note: For additional operating information consult PAM24-112 IOM Manual. The performance specifications are nominal and conform to acceptable industry standards. For application at conditions beyond these specifications, consult the nearest Bray office. Bray controls shall not be liable for damages resulting from misapplication or misuse of its products.

Wiring

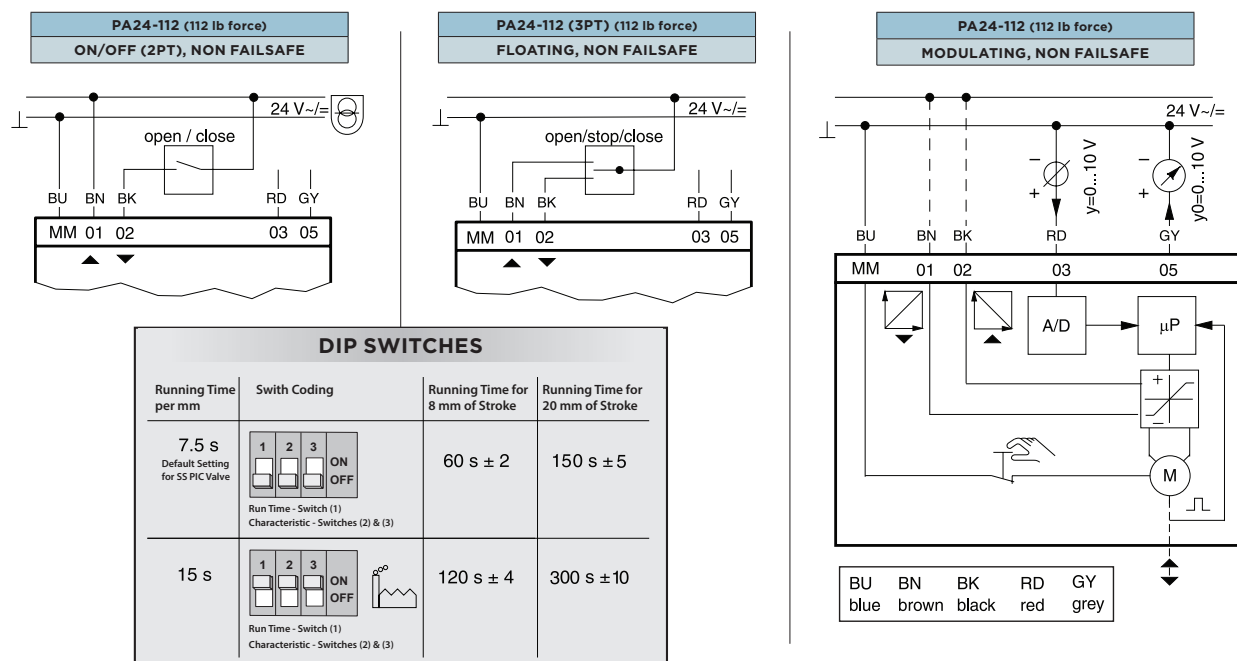

Bray COMMERCIAL

Bray Commercial provides automated Butterfly, Ball, Globe and Pressure Independent Control Valves to the commercial building HVAC market throughout the world. Wherever valve performance is required to maintain climate controlled environments, Bray can provide the required automated valves to meet the demanding flow applications of chiller/boiler isolation, air handlers and terminal units for new construction, retrofit and/or LEED certification applications in buildings.

Building Types

- Healthcare
- Data Centers
- Government and Municipal
- Sports/Entertainment/Convention Centers
- K-12 and University Education
- Transportation
- Hotels
- Office Buildings
- Retail

SINCE 1986, BRAY HAS PROVIDED FLOW CONTROL SOLUTIONS FOR A VARIETY OF INDUSTRIES AROUND THE WORLD.

VISIT [BRAYCOMMERCIALDIVISION.COM](https://www.braycommercialdivision.com) TO LEARN MORE ABOUT BRAY PRODUCTS AND LOCATIONS NEAR YOU.

CORPORATE HEADQUARTERS

Bray International, Inc.
13333 Westland East Blvd.
Houston, Texas 77041
1-281-894-5454



DIVISION HEADQUARTERS

Bray Commercial
13788 West Road, Suite 200A
Houston, Texas 77041
1-888-412-Bray (2729)



All statements, technical information, and recommendations in this bulletin are for general use only. Consult Bray representatives or factory for the specific requirements and material selection for your intended application. The right to change or modify product design or product without prior notice is reserved. Patents issued and applied for worldwide. Bray® is a registered trademark of Bray International, Inc.

© 2022 BRAY INTERNATIONAL, INC. ALL RIGHTS RESERVED.